



Version 2.1



## Specifications


# MODEL TLH-5930

International size reference: D, ER32L615

### TECHNICAL DATA


(Typical values @+ 25°C for batteries stored for one year or less)



- Nominal capacity @ 4 mA, to 2 V 17 Ah
  - Rated voltage 3.6 V
  - Maximum recommended continuous current 230 mA
  - Maximum pulse current capability 500 mA
  - Weight 93 g (3.28 oz)
  - Volume 51 cc
  - Operating temperature range -55 °C to +125 °C
  - Li metal content approx. 5 g
- U.L. Component Recognition, MH 12193

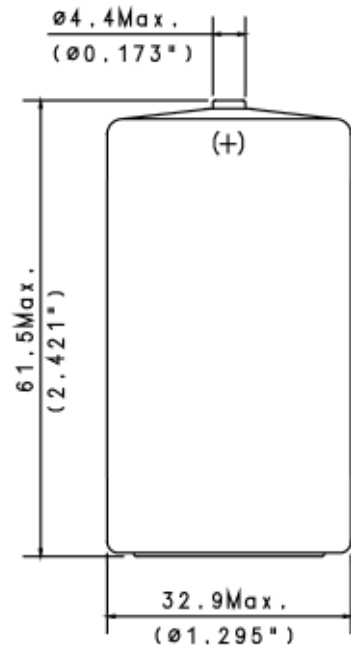

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5930-21505
SUFFIX- /T SOLDER TABS	15-5930-31505

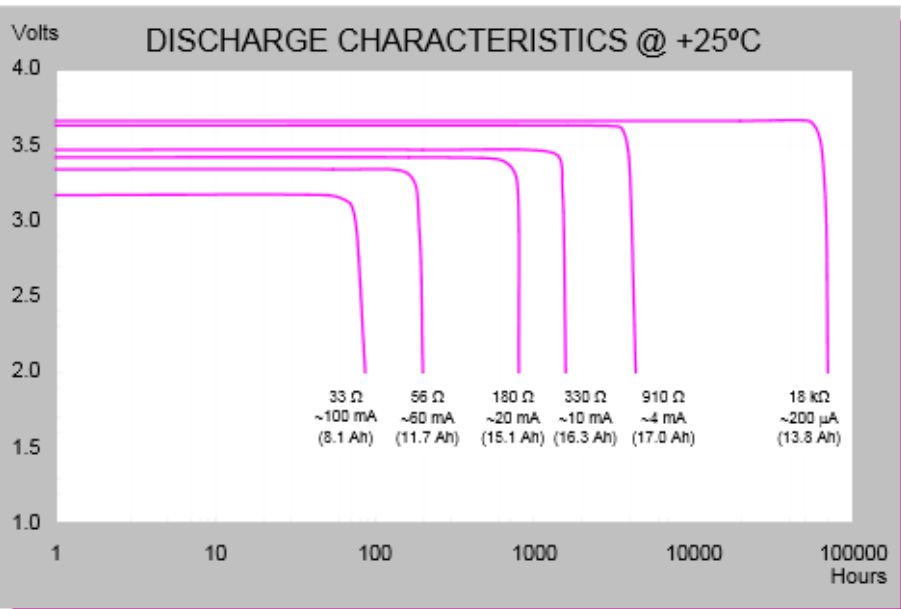

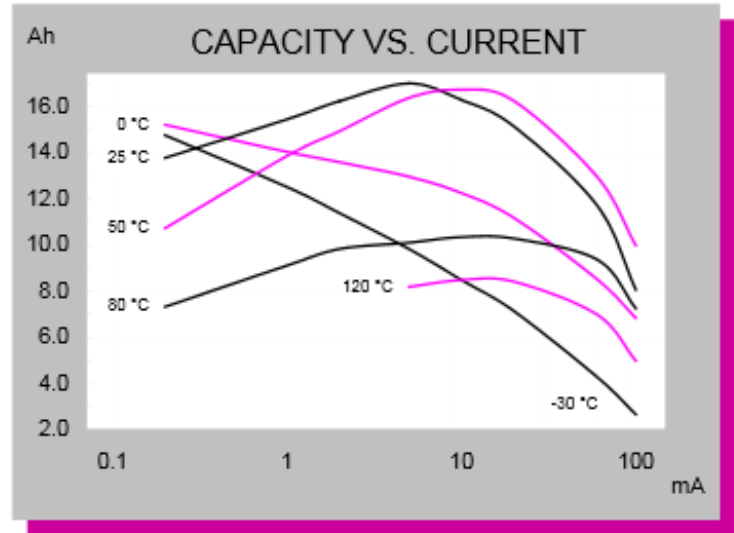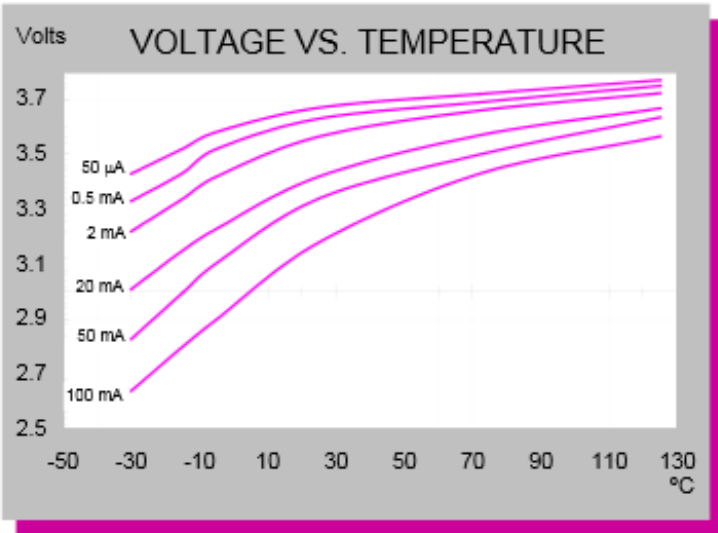

# Extended Temperature Range

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.



Diamond Traffic  
 76433 Alder Street  
 Oakridge, OR 97463  
 diamondtraffic.com

Phone 541.782.3903  
 Fax 541.782.2053  
[sales@diamondtraffic.com](mailto:sales@diamondtraffic.com)